



OMNILINE HIGH PERFORMANCE Rejection System

Omniline Low Pressure with High Speed Impulse Rejector

Omnifission USA
US Sales Office
Houston, Texas
855.921.9900
info@omnifissionusa.com
www.omnifissionusa.com

Omnifission Canada
1900 Clark Blvd
Unit 1 & 2
Brampton, ON
L6T OE9
www.omnifission.com


Manufactured in Canada




OMNILINE IMPULSE

System Highlights

- Omniline Low Pressure impulse Rejector
- Low Pressure (50 PSI) High Speed (8 msCycle time)
- Capable of Rejecting Up to 2400 Containers per Minute
- Uses a Single Actuator (Only One Moving Part) Reducing Maintenance & Downtime
- High Performance Pneumatic Valve
- Long Life Components Provide Excellent System Reliability
- Operates from Full Stop to Maximum Speed with No Performance Degradation
- Upright Rejection with Various Fill Heights
- Automatically Adjusts for Various Containers Diameters
- Performs on All Container Types & Sizes without adjustment or change parts
- 12 Months Full System Warranty (Including the Pad)
- Available with Soft or Hard Pad Configuration
- Complete System Includes Conveyor Mount and Air Controls

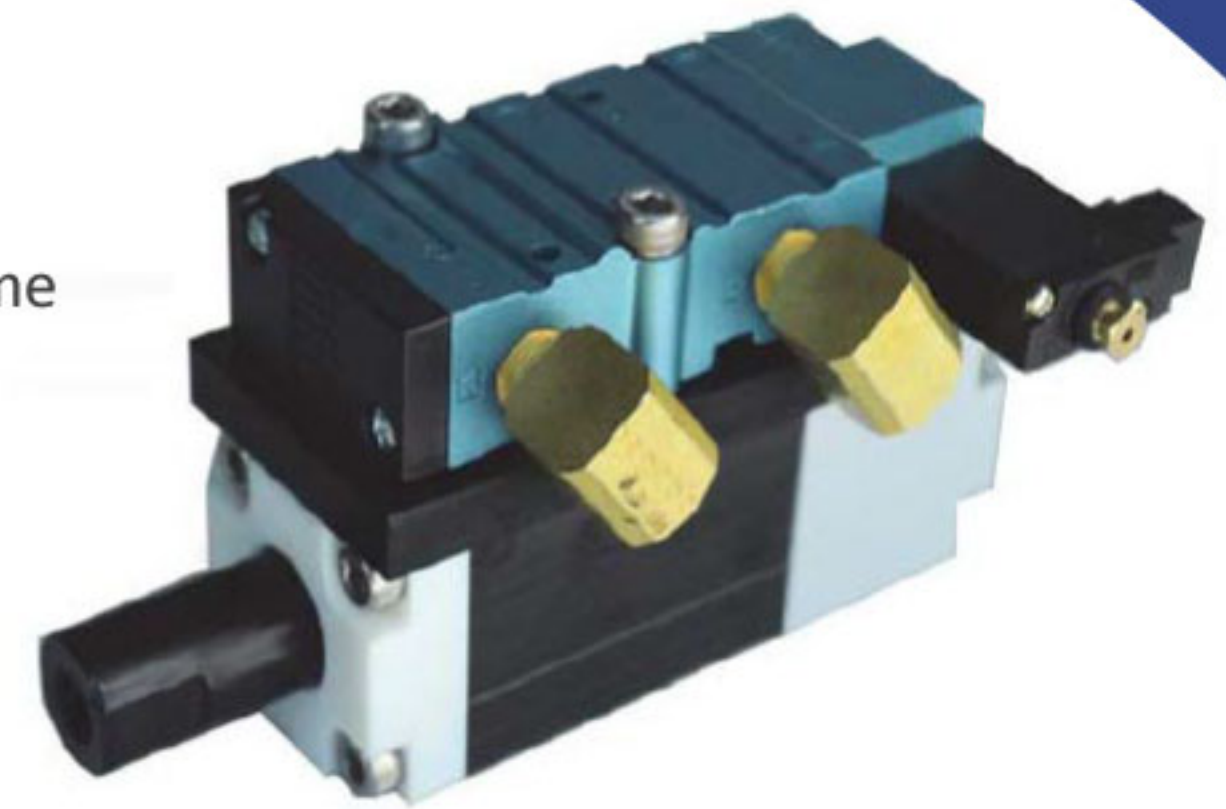

Dimensions

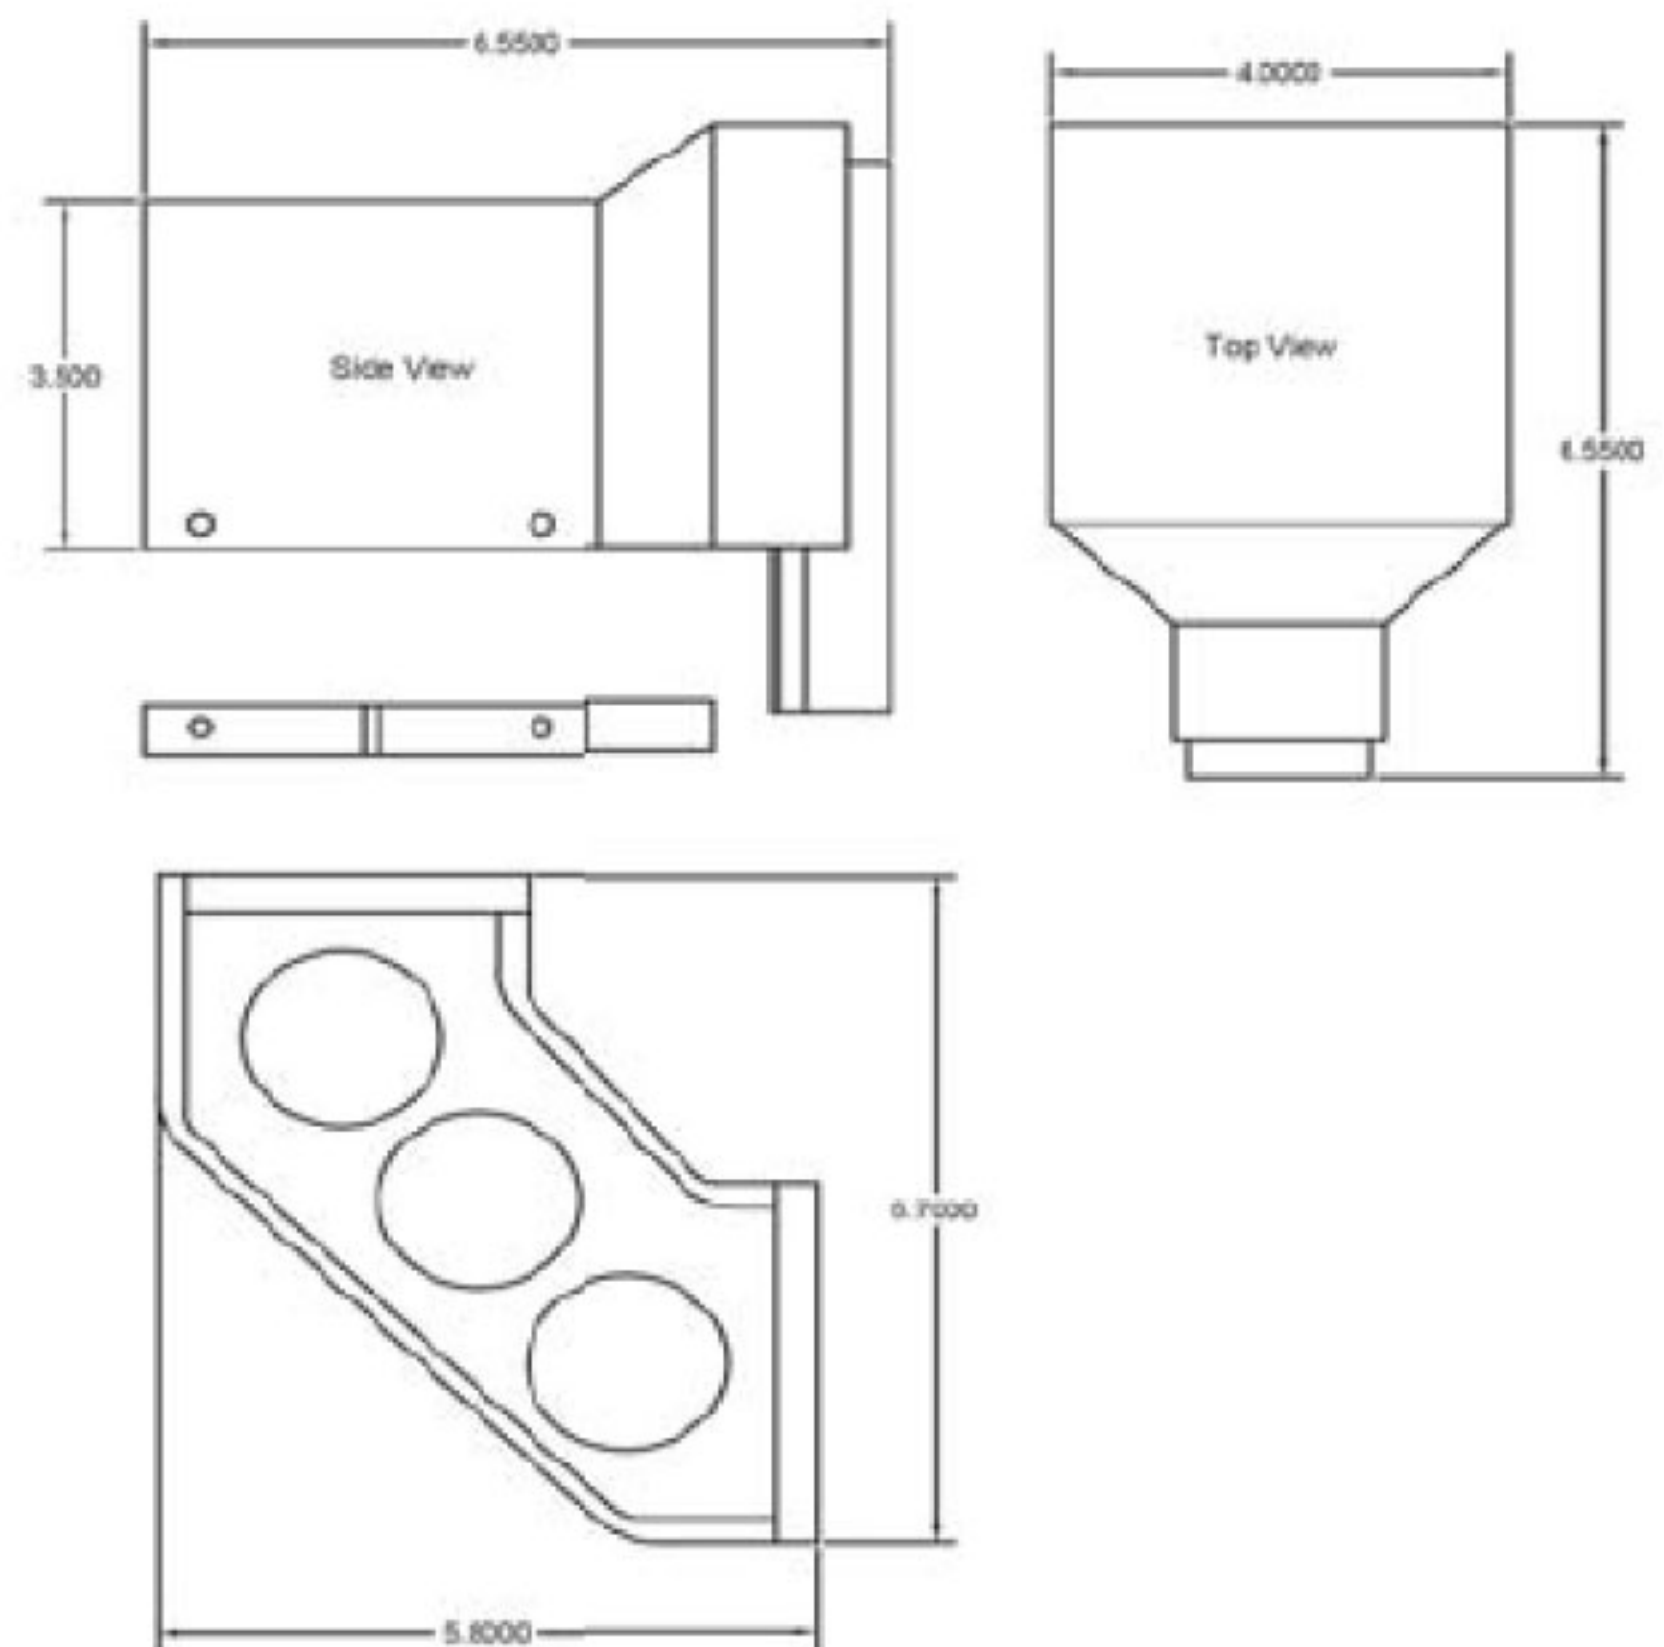

Specifications

Operating Speed

Up to 160 Crates per Min

Environmental Standards

Nema4X / IP65

Air Requirement

60 PSI

Control Voltage

24 VDC

Materials

Stainless Steel Construction

